



**MULTIPLASTICS (EUROPE) Limited**

**Multiplastics (Europe) Ltd.**  
Columbus House,  
30 Manchester Road,  
Northwich, Cheshire.  
CW9 5ND

**Tel: +44 (0) 1606 330011**  
**Fax: +44 (0) 1606 331990**  
**sales@multiplastics.co.uk**  
**www.multiplastics.co.uk**



Certificate Number 7877  
ISO 9001




# LCF3006

## Opaque Polystyrene Interleafing Film

**LCF3006** is a white biaxial orientated Polystyrene film that contains no plastizers. Developed specifically to meet the technical requirements of food interleafing. This product can be used for separating portions of many types of food stuffs and is fully EU and FDA approved.

### Features

- Converts well on all makes of machines
- Static free
- None heat seal
- Low density gives a high yield
- High strength for ease of use
- Contains NO post-consumer recycled material
- Complies with FDA and EU regulations for direct food contact

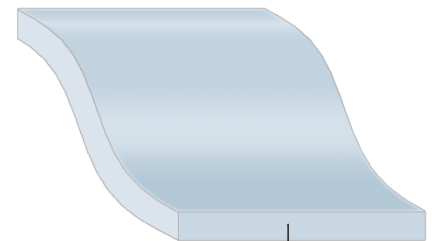

OPS Core Layer

### Typical Applications

- Food Envelopes
- Food interleaf

### Gauges Available

- 38, 50 and 75 micron (others on request)

### General Information

- Handling and Product Health and Safety details available on request
- Recommended storage in dry conditions between 30 °C and 5 °C
- Best used within 24 months of manufacture



**MULTIPLASTICS (EUROPE) Limited**

**Multiplastics (Europe) Ltd.**  
Columbus House,  
30 Manchester Road,  
Northwich, Cheshire.  
CW9 5ND

Tel: +44 (0) 1606 330011  
Fax: +44 (0) 1606 331990  
sales@multiplastics.co.uk  
www.multiplastics.co.uk



Certificate Number 7877  
ISO 9001



### Typical Properties

Properties	Unit	Test Method	Value		
Thickness	mu	DIN 53370	38	50	75
Specific Gravity	%	ASTM D1505	1.050		
Yield	m <sup>2</sup> / Kg	ASTM D2673	25.06	19.05	12.70
Tear Strength	PSI	ASTM D882	8000-12000		
Haze	%	ASTM D1003A	<75		
Gloss	%	ASTM D2457	<150		
Modulus of Elasticity	psi	ASTM D882	420,000-450,000		
Temperature Resistance	°C		-35 to 85		

As all applications are subject to those conditions prevailing within specific applications, we recommend that a test be carried out to your satisfaction prior to full production.

The information and data contained in this document are given in good faith and supersede those given in any previous version. No liability, warranty or guarantee of final product performance is created by this document. No freedom from any patent is granted or to be inferred. This document does not constitute as a sales specification.

December 2015