

EzTear™

1WEZ PRODUCT INFORMATION SHEET

**Easy Tear Stick Pack
White Laminated Film Pouch Structure
FDA Compliant for direct food contact**

Description


1WEZ is an easy tear plastic film lamination structure for use in stick pack or similar flexible packaging applications. It is heat sealable with an excellent appearance. DiversaSeal® sealant technology allows this structure to be used across multiple product applications. It has good moisture and oxygen barrier properties. It offers excellent printability. It can be surface printed or used unprinted.

Performance Characteristics

- Excellent Printability
- Easy Tear Initiation
- Puncture Resistant
- High Burst Strength
- Good Stiffness
- Good Chemical Resistance
- Good Moisture & Oxygen Barrier Properties

Typical Applications

- Runs well on dual web fed, flat, vertical fill
- Runs well on dual web, flat, horizontal fill
- Runs well on single web, flat, horizontal fill
- Runs well on multiple lane, vertical fill

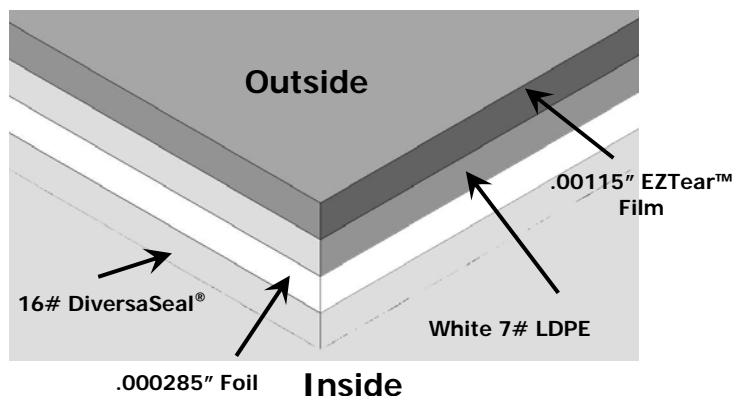

Primary Markets

- Fragrance or Non-fragrance cosmetics
- Wet goods or liquid product
- Alcohol based wipes, lotions, shampoos
- Powder dry goods, very fine to granular
- Medical or Nutraceutical
- Hard to hold

Product	Gauge	Yield Sq. inch per Lb.
1WEZ .00115" EzTear™ Film / 7# White LDPE / .000285" Foil/ 16# DiversaSeal®	.0029"	8,212

Patent Pending - By purchasing this EzTear™ product, you are expressly granted a license to use it for tearable packaging and pouch purposes. This license is revocable upon non-payment or other breach of the purchase terms and conditions.

Terms 1% 10 Net 30 days / Freight Collect - Not combinable with other MPI products

55 Moore Court / Whitby, Ontario L1N 9Z8 Canada / mpanada@multi-plastics.com / www.multi-plastics.com



Flexible Packaging Films

December 2012

TECHNICAL DATA SHEET

Properties	Units	Typical Values
Basis Weight	lbs/3000 sq ft	52.6
Gauge	mil	2.9
Yield (+/- 10%)	in ² /lb	8,212
COF sealant / sealant		.4 static .25 kinetic
Heat Seal Strength	.6s/40 psi/300°F	5000 g/in
Heat Seal Temp	.6s/40psi - °F	300
WVTR @ 100°F , 90% RH	g/100in ² /24hr	.001
OTR @ 73°F (23°C), 0% RH	cc/100in ² / 24 hr	.001

Storage & Handling: Flexible packaging films should be placed in the processing area 24 hours prior to processing to acclimatize. Even though these films are largely unaffected by climatic conditions, they should not be stored at temperatures above 104 degrees F. Under suitable storage conditions, the film can be stored for a period of six months without any risk of deterioration. The customer is responsible for determining the shelf life of the packaged product.

Required Information

Project Name: _____

New or Existing Project: _____

If existing, what is the current product spec configuration or product code being used?

What is being packaged? (Wet or Dry Goods) _____

If wet, does it have high alcohol or grease content? _____

If dry, is it powder or granular? _____

What are the primary ingredients? _____

The information herein, is to the best of our knowledge, true, and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.