



MULTIPLASTICS (EUROPE) Limited

Multiplastics (Europe) Ltd.
Columbus House,
30 Manchester Road,
Northwich, Cheshire.
CW9 5ND

Tel: +44 (0) 1606 330011
Fax: +44 (0) 1606 331990
sales@multiplastics.co.uk
www.multiplastics.co.uk



Certificate Number 7877
ISO 9001




HSF5120H

Cavitated White Heat Sealable Polypropylene Film

HSF5120H is a bi-axially orientated, cavitated white polypropylene film with olefin heat sealable layer both sides and one-side corona treated. A co-extruded product giving hot tack, free seal type for large size and weight packages.

Features

- One side corona treated
- High yield
- High gloss and stiffness
- Good seal tack
- Excellent printability
- High seal strength
- Exceptional machinability on a wide range of packaging machines
- Contains a maximum 25% recycled production polymer
- Contains NO post-consumer recycled material
- Complies with FDA and EU regulations for direct food contact

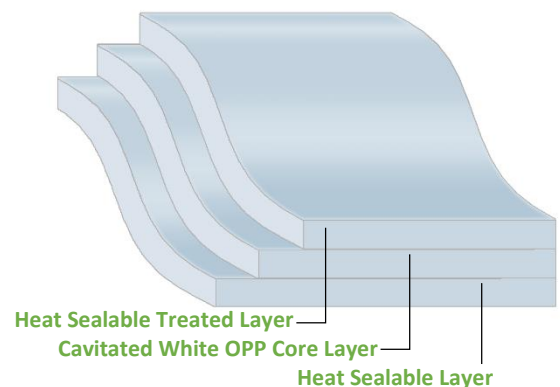

Typical Applications

- Suitable for printing, single ply or laminate applications
- Suitable for food and confectionary packaging

Gauges Available

- 20, 25, 30, 35 and 40 micron

General Information

- Handling and Product Health and Safety details available on request
- Recommended to store in dry condition below 30 °C and above 5 °C
- Best used within 6 months of manufacture
- Any folding or perforating will be carried out by either a BRC accredited or company approved sub-contractor



MULTIPLASTICS (EUROPE) Limited

Multiplastics (Europe) Ltd.
Columbus House,
30 Manchester Road,
Northwich, Cheshire.
CW9 5ND

Tel: +44 (0) 1606 330011
Fax: +44 (0) 1606 331990
sales@multiplastics.co.uk
www.multiplastics.co.uk



Certificate Number 7877
 ISO 9001



Typical Properties

Properties		Units	30mu
Grammage		g/m ²	24.0
Yield		m ² /kg	41.6
WVTR		gr / m ² / day 38°C 90% RH	5.0
Tensile strength	MD	Mpa	120
	CD	200mm / min pull rate	200
Breaking Elongation	MD	%	160
	CD	200mm / min pull rate	65
Coefficient of friction	Untreated	film to film	0.25
	Treated		0.30
Surface tension		dynes / cm	
Gloss		% at 45°C	55
Light Transmission		%	33
White Index			90

As all applications are subject to those conditions prevailing within specific applications, we recommend that a test be carried out to your satisfaction prior to full production.

The information and data contained in this document are given in good faith and supersede those given in any previous version. No liability, warranty or guarantee of final product performance is created by this document. No freedom from any patent is granted or to be inferred. This document does not constitute as a sales specification.

December 2015