



MULTIPLASTICS (EUROPE) Limited

Multiplastics (Europe) Ltd.
Columbus House,
30 Manchester Road,
Northwich, Cheshire.
CW9 5ND

Tel: +44 (0) 1606 330011
Fax: +44 (0) 1606 331990
sales@multiplastics.co.uk
www.multiplastics.co.uk



Certificate Number 7877
ISO 9001




HSL4200W EVOH

Clear Heat Sealable EVOH LLDPE/PET Laminate Film

HSL4200W EVOH is a twin laminate film with a EVOH (ethylene vinyl alcohol) coating. The coating increases the gas and moisture barrier to enhance shelf life of the products packed. This material gives a strong welded seal and the laminate make up is PET/LLDPE/EVOH/LLDPE giving excellent clarity and an excellent sealing strength on all types of sealing machines.

Features

- High gas and Moisture barrier
- One side heat sealable
- High Gloss and stiffness
- Exceptional clarity
- Excellent weld seal
- Excellent printability
- Exceptional machine ability on a wide range of packaging machine
- Contains NO post-consumer recycled material
- Complies with and EU regulations for direct food contact

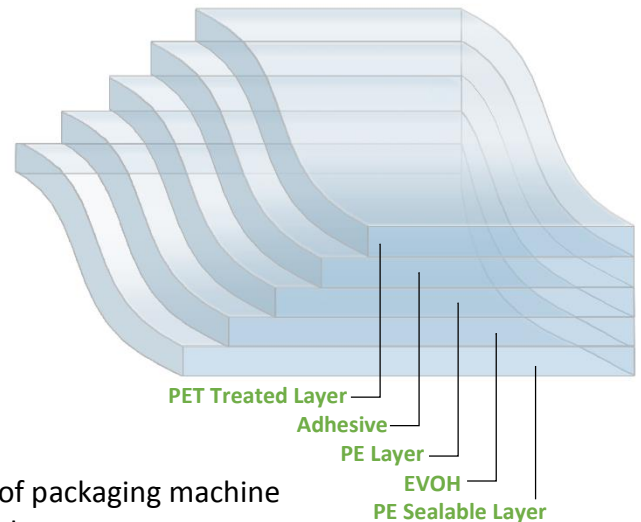

Typical Applications

- Where high barriers are required. eg Fresh Fish, Meat and Bread
- Suitable for food and confectionary packaging

Gauges Available

- 12/50 and 12/60 other constructions available on request

General Information

- Handling and Product Health and Safety details available on request
- Recommended to store in dry condition below 30 °C and above 5 °C
- Best used within 9 months of manufacture



MULTIPLASTICS (EUROPE) Limited

Multiplastics (Europe) Ltd.
Columbus House,
30 Manchester Road,
Northwich, Cheshire.
CW9 5ND

Tel: +44 (0) 1606 330011
Fax: +44 (0) 1606 331990
sales@multiplastics.co.uk
www.multiplastics.co.uk



Certificate Number 7877
ISO 9001



Typical Properties

Properties	Test Method	12/50	12/60
Grammage	g/m ²	66	76
Minimum sealing temperature	°C	120	
Adhesion	N / 15mm	1.2	
COF	int/int	0.25	
	ext/ext	0.40	
OTR (65% RH)	cc / m ² / day	2.5	
WVTR (90% RH)	gr / m ² / day	6.5	5.5

As all applications are subject to those conditions prevailing within specific applications, we recommend that a test be carried out to your satisfaction prior to full production.

The information and data contained in this document are given in good faith and supersede those given in any previous version. No liability, warranty or guarantee of final product performance is created by this document. No freedom from any patent is granted or to be inferred. This document does not constitute as a sales specification.

December 2015